
Fast Shutter Door





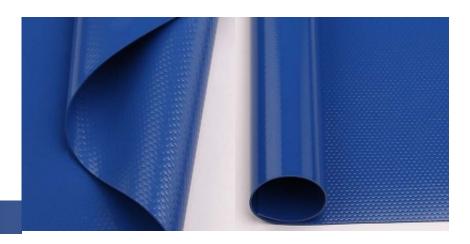

Product Name: Fast Shutter Door

Product Specification: 1000*1000D/20*20; 1000*1000D/23*23; 1000*1000D/30*30, etc.

Weight (GSM): 900G, 1050G, 1300G, etc.

Product Features:

*Good Physical and Mechanical Properties: The base fabric is woven with high-strength and low-shrinkage industrial polyester yarn. The service life is over 10 years, and the product can still maintain 75% tensile strength.

*Good Self-Cleaning, Anti-Mildew and Anti-Ultraviolet: The product is added with biological anti-fungal agent, anti-aging agent and other additives. The product can be surface treated by PVDF or acrylic according to customer's requirements, and has good anti-pollution property.

*A Wide Variety of Colors: In addition to the conventional white, it can also produce red, gray, blue and other colors to meet the needs of different occasions.

*Excellent Flame Retardant Performance: According to the special needs of customers and application sites, it can reach China B1 standard or European M2 standard.

*Good Welding Performance: In addition to the PVDF surface treatment products need to be welded by grinding; all other products have very good welding performance.

Application: Our products are used for fast shutter door.

Product link: https://www.cnuneed.com/fast-shutter-door.html