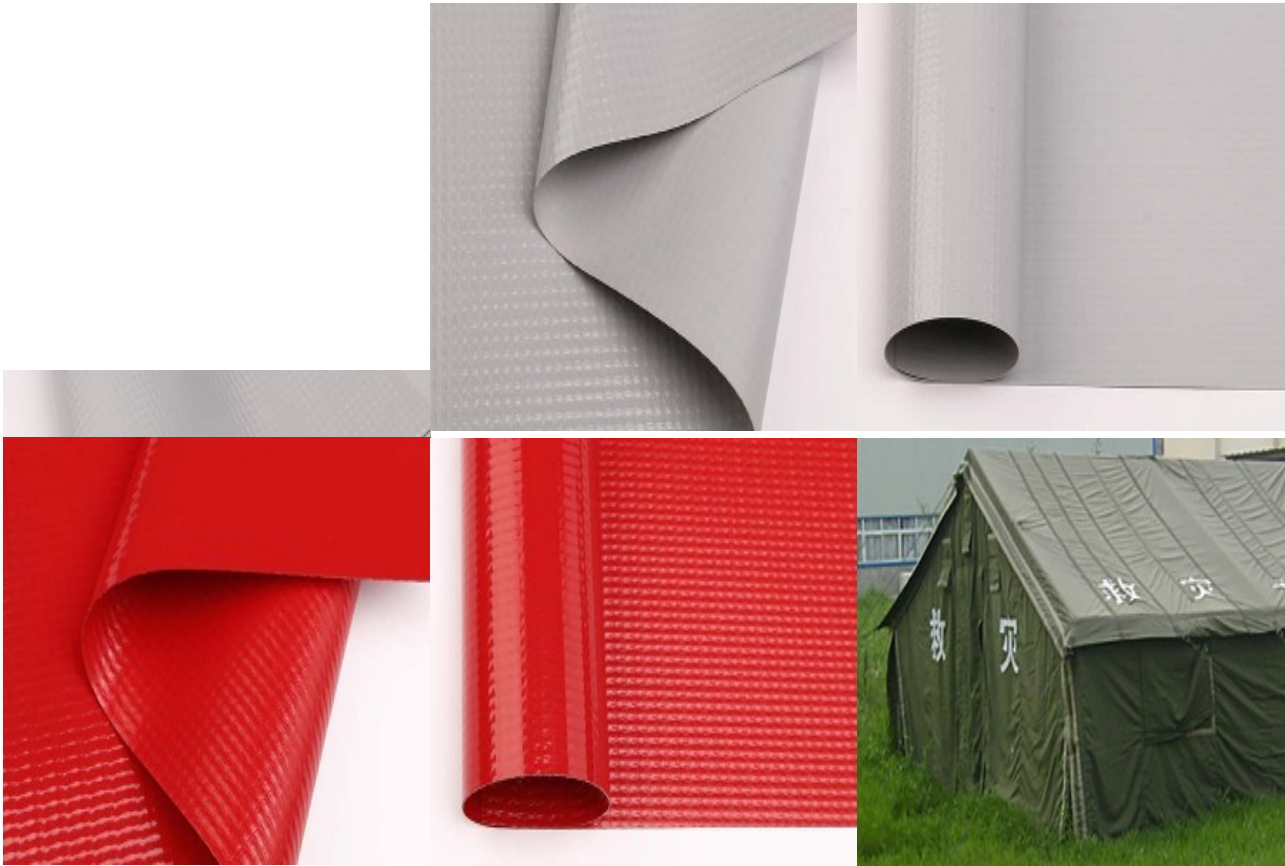

Laminated Tent Tarpaulin





Laminated Tent Tarpaulin

Product Specification: 250*250D/22*19, 300*500D/18*12, 500*500D / 9*9, 1000*1000D / 9*9, 1000*1000D/12*12, 1000*1000D/14*14, etc.

Weight (GSM): 380G, 400G, 450G, 500G, 550G, etc.

Product Features:

- *Lightweight
- *High Strength
- *Novel Appearance
- *Bright Color
- *Self-Cleaning
- *Anti-Fouling
- *Anti-Aging
- *Good Color Fastness
- *Long Service Life
- *The polyvinyl chloride can be treated to have certain properties such as flame retardant, cold resistance, skid resistance, UV protection, PVDF, photocatalysis and environmental protection to satisfy customers' special request

Items/Base Fabric		250*250D 22*19	300*500D 18*12	500*500D 9*9	500*500D 18*17	1000*1000D 9*9	1000*1000D 12*12	Test Method
Weight (GSM)		400	380	380	450	450	550	DIN53352
Tensile Strength (N/5CM)	L	1000	550	750	1400	1400	2000	DIN53354
	W	900	450	740	1300	1200	1600	
Tearing Strength	L	150	160	150	300	210	400	DIN53363

(N/5CM)	W	130	140	120	320	200	300	
Adhesion (N)		40	40	50	50	80	80	DIN53357
Light Fastness (Except White)		6--7						
FR Certification (Optional)		B1/B2/M1/M2/NFPA-701/DIN75200						
Environmental (Optional)		REACH/ROHS/EN71-3/ASTM-F963						
Temperature Resistance		-30?--+70?						
Width (M)		UP TO 5.1M						
All our Technical Characteristics are Referential.								

Product link : <https://www.cnuneeed.com/laminated-tent-tarpaulin.html>