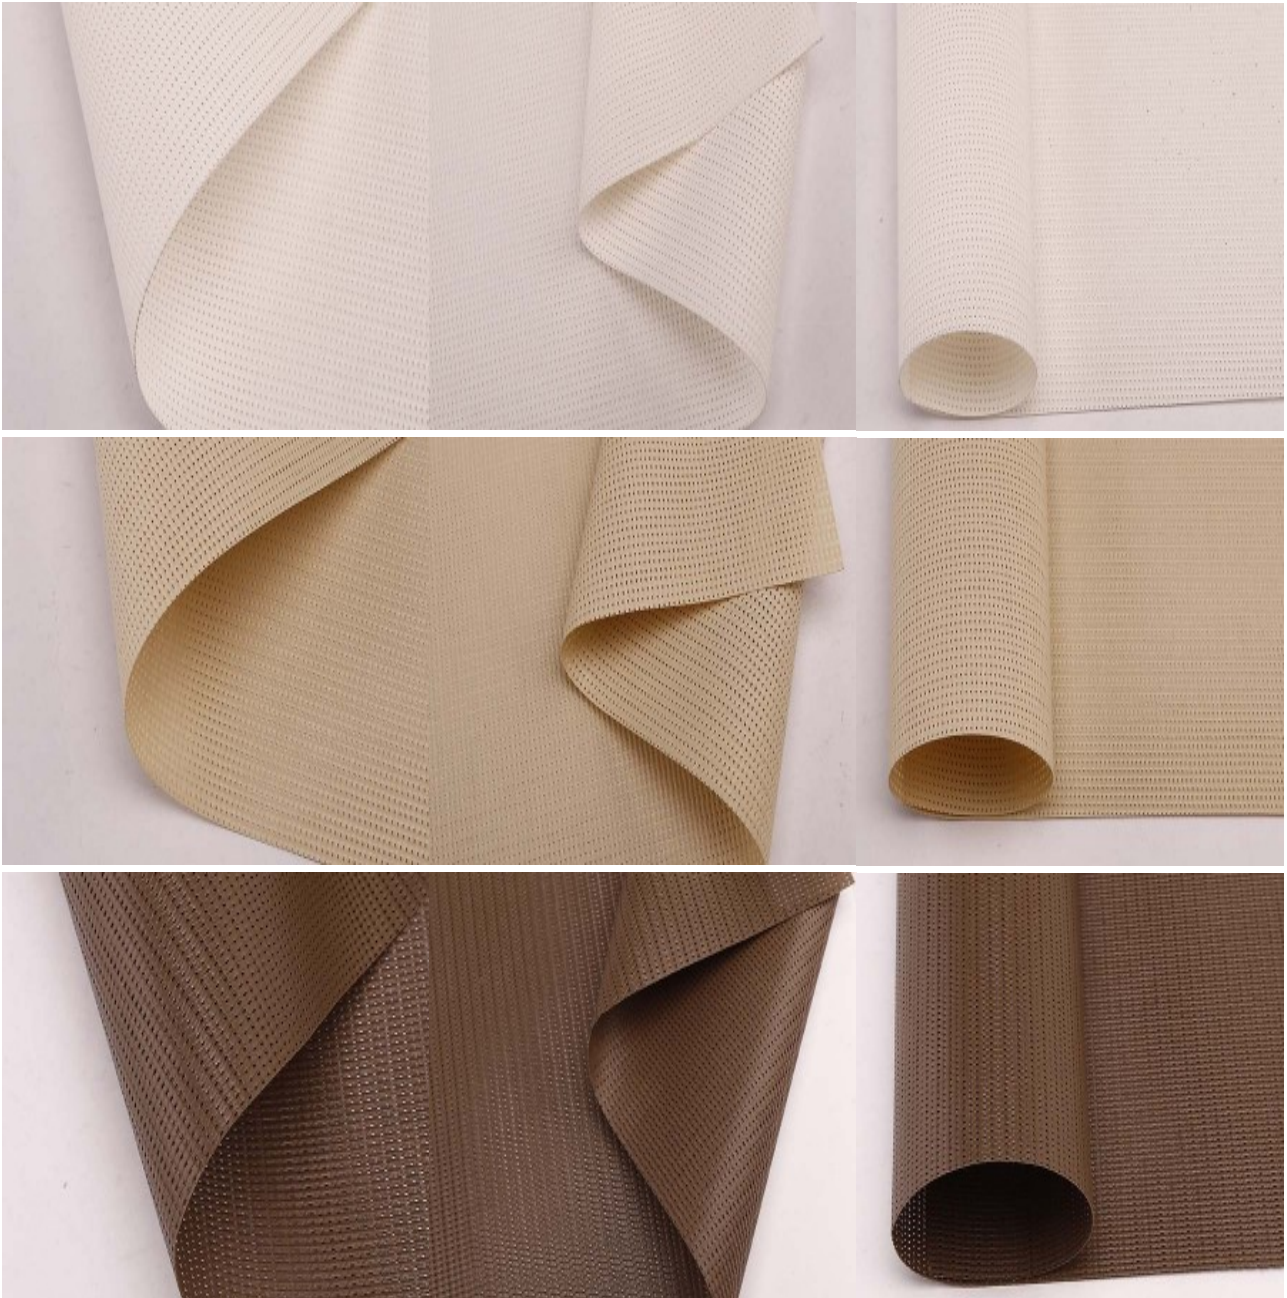
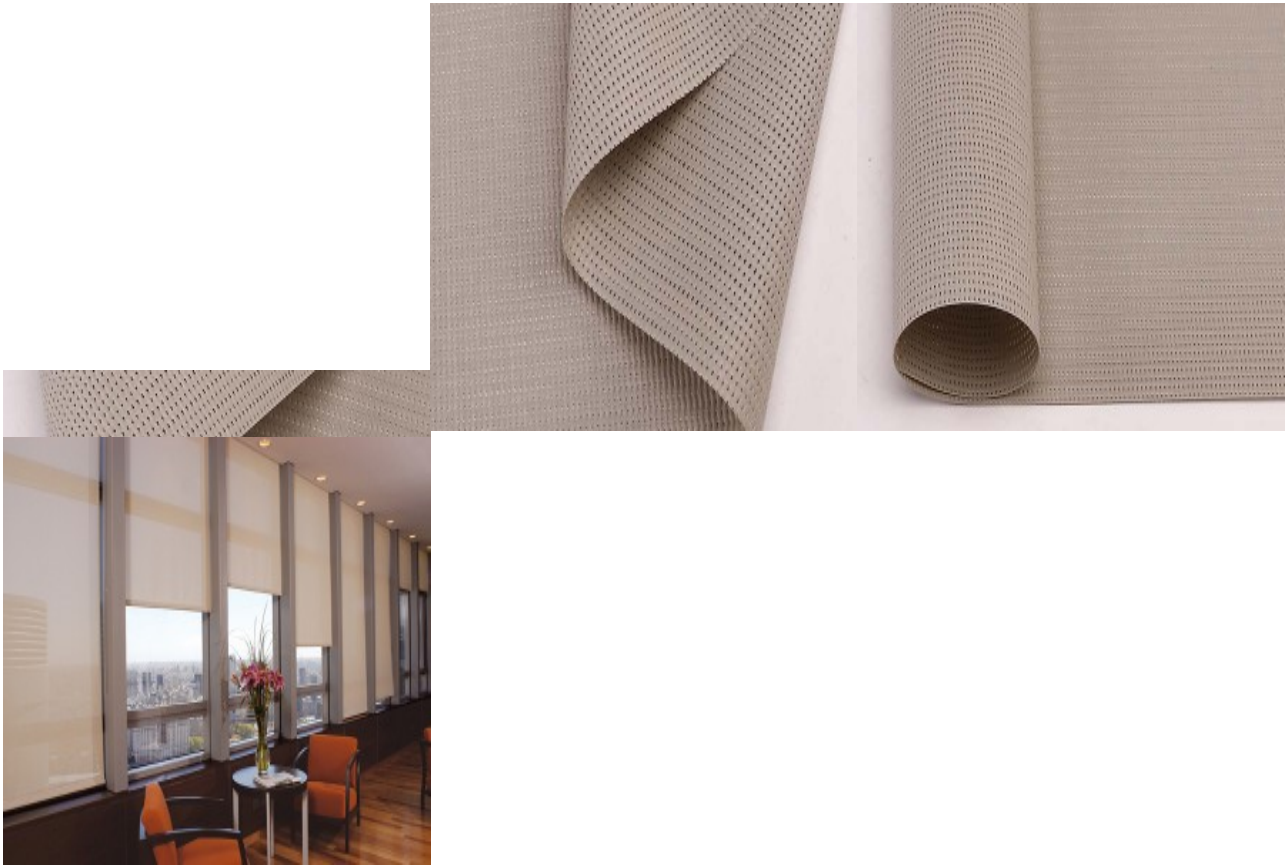

Sunscreen





Product Name: Sunscreen

Product Specification: 2.0M, 2.50M, 3.0M

Thickness: 0.5MM

Features:

*The product uses advanced PVC+PET+ polymer composite modified materials with the following permanent features: fire retardant, stability/tensile strength, heat insulation, durability, easy maintenance and energy saving. The wrinkle-free polyester sunscreen fabric dramatically reduces solar radiation and isolates the sun, creating a comfortable environment.

Items	Test Result	Test Method
Composition	30% Polyester?70% PVC	
Thickness (MM)	0.50MM±5%	FZ/T01003-1991
Tensile Strength (N/5CM)	L 2580N,W 2300N	DIN53354:1981
Tearing Strength (N/5CM)	L 330N, W 320N	DIN53363:2003
Openness Factor	3%	FZ/T01009-2008
Abrasion Resistance	?10000	ASTM D4966
Light Fastness	7	GB/T8427-2008/ ISO 105 B02/ ATCC
FR Certification	B2 (Oxygen Index)?27mm)/NFPA701/M2	GB 50222-95/ NFPA701/ NFP92-503

Environment	J/T307-2006 OEKO-TEX STANDARD 100CLASS ZV GREEN GUARD ECOSPECIFIER C EC ROHS
Width	2M/2.5M/3.0M

Product link : <https://www.cnuneeed.com/sunscreen.html>